




UL 3266 / CSA AWM I A/B 125°C 300V RADOX connecting leads

GENERAL PROPERTIES:

Excellent high temperature, low temperature, ozone and weathering resistance, flame retardant, easy to strip and process, heat pressure and highly abrasion resistant, soldering iron resistant, flexible.

APPLICATION:

For protected and fixed installation inside electrical equipment, especially suitable for the connection of motor windings, switchboards, magnets and transformers.

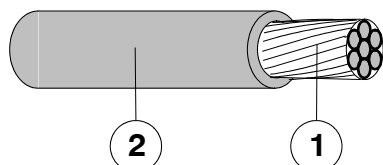

1. Conductor : Stranded tin plated copper, flexible
2. Insulation : RADOX
extruded irradiation crosslinked polyolefin
Colours : various

Printing :

AWM Style 3266 125 °C 300V HUBER + SUHNER [prod.-place] RADOX CSA AWM I A/B 125 °C 300V FT2 [cross section]

Technical data:

Voltage rating	300 V
Test voltage	2 000 V
Temperature rating	(UL/CSA) + 125 °C
Minimum temperature	flexing - 25 °C
	fixed - 40 °C
Min. bending radius for fixed installation	see Table 1

The cables comply with the following standards:

Appliance wiring material	CSA C22.2 No. 210.2	AWM I A/B 125°C 300 V
Appliance wiring material	UL 758	Style 3266

The cables pass the following fire tests:

Horizontal flame spread FT2	L ≤ 100 mm	CSA C22.2 No. 2556 # 9.1
Horizontal flame spread, Appliance-Wire	V ≤ 25 mm/min.	UL 1581 # 1090

Approvals:

UL	File E63322
CSA	File 069581

Copyright 2016 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11
+41 (0)44 952 26 40



www.hubersuhner.com



UL 3266 / CSA AWM I A/B 125°C 300V RADOX connecting leads

TABLE 1: Dimensions, weight

Cross Section: UL 758 CSA C22.2 No. 210		Cross-section: EN 60228/ IEC 60228	Conductor construction	Conductor diameter	Core diameter D.	Weight	Bending radius	Conductor resistance at 20°C
AWG	nom. mm ²	nom. mm ²	nom. n x mm d	max. mm	mm	nom. kg / 100m	min. mm	max. Ω / km
26	0.128		19 x 0.10	0.50	1.32 ± 0.05	0.32	3 x D	133
24	0.205		19 x 0.13	0.61	1.45 ± 0.05	0.41	3 x D	86.0
22	0.324		19 x 0.16	0.77	1.65 ± 0.10	0.53	3 x D	53.1
		0.50	19 x 0.18	0.90	1.86 ± 0.10	0.73	3 x D	38.2
20	0.519		19 x 0.20	0.99	1.85 ± 0.10	0.93	3 x D	32.4
18	0.823		19 x 0.25	1.23	2.10 ± 0.10	1.13	3 x D	20.4
(16)		1.5	19 x 0.31	1.52	2.41 ± 0.10	1.65	3 x D	13.0
14	2.08		19 x 0.37	1.86	2.72 ± 0.10	2.33	3 x D	9.32
12	3.31		37 x 0.35	2.35	3.21 ± 0.10	3.53	3 x D	5.88
10	5.26		37 x 0.44	3.02	3.88 ± 0.10	5.61	3 x D	3.62