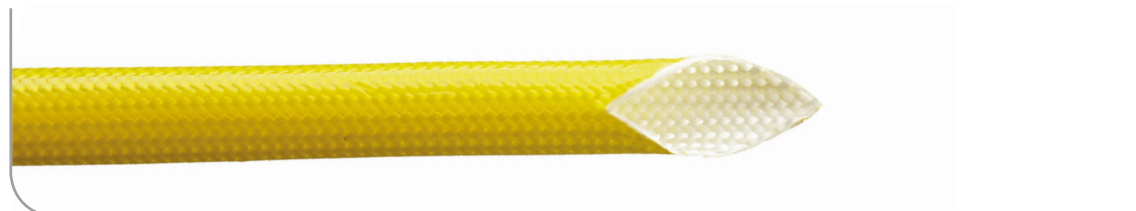


TEXPOL® F ESPECIAL ACRÍLICO**-30°C to +155°C****Class F**

FIBREGLASS BRAIDED SLEEVING WITH ACRYLIC COATING

**Standards***

- UNE 21-375-3
- IEC 60684 series
- UL 1441

Applications

- Electrical protection of conductors and terminals in class F appliances.

Options

- Other diameters: *contact us*
- Sleeveings cut to length: *contact us*

Packaging

- Diameters from 0.5 to 1.5 mm: 200 m rolls
- Diameters from 2 to 4.5 mm: 100 m rolls
- Diameters > 4.5 mm: 50 m rolls

Standard products

- Colour: yellow
- Other colours: *contact us*

**Standards: our products comply with all or part of the requirements of standards quoted; contact us.*

Characteristics**General**

- Continuous operating temperature: **-30°C to +155°C**
- Good resistance to humidity and common chemical environments
- Compatible with most impregnation varnishes class F
- Very good flexibility
- Halogen-free

Electrical

- Dielectric strength (dry):
Central value: 3.5 kV
Lowest value: 2.5 kV

Internal diameter (mm)	Minimum wall thickness (mm)
0.5	0.20
0.8	0.20
1	0.20
1.5	0.20
2	0.20
2.5	0.20
3	0.20
3.5	0.30
4	0.30
4.5	0.30
5	0.30
6	0.30
7	0.30
8	0.30
9	0.40
10	0.40
12	0.40
14	0.40
16	0.40
18	0.40
20	0.40
22	0.40
25	0.40

TEXPOL AISLANTES, S.L.U.
Ctra. de Girona a Sant Feliu, Km. 11
17244 Cassà de la Selva (Girona)
Tel. +34 972 46 05 74 - Fax +34 972 46 49 21
texpol@omerin.com.es



The information provided in this technical data sheet is indicative and may be modified without prior notice. Conditions of use and environment of the product can not be fully considered in our studies. In no way the company TEXPOL shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of use that do not respect the good practice and the standards in force.

For an optimum use of the products supplied by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of TEXPOL AISLANTES S.L.U.. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of TEXPOL.